

DS-K1T341CMFW Face Recognition Terminal



- Deep learning algorithm
- 4.3-inch capacitive touch screen, 2 MP wide-angle dual-lens
- 3,000 face capacity, 3,000 card capacity, 3,000 fingerprint capacity and 150,000 event capacity
- Multiple authentication modes, including face, fingerprint and card, etc.
- Face recognition duration < 0.2 s/User
- Supports mask wearing detection
- Connects to external access controller or Wiegand card reader via Wiegand protocol
- Two-way audio with client software, door station, indoor station, and main station
- Connects to secure door control unit via RS-485 protocol to avoid the door opening when the terminal is destroyed


▪ Specification

Display	
Screen size	4.3 inch
Operation method	Capacitive touch screen
Video	
Lens	2
Resolution	2 MP (video stream: 720P)
FOV	HFOV = 41.5°; VFOV = 75.5°; DFOV = 87°
Audio	
Tone quality	Noise suppression and echo cancellation
Network	
Wired network	10 M/100 M self-adaptive
Wi-Fi	Support
Interface	
Network interface	1
Lock control	1
Exit button	1
Door contact input	1
TAMPER	1
RS-485	1
Wiegand	1
USB	1
Authentication	
Card type	Mifare 1 card
Function	
QR code recognition	Support
Face anti-spoofing	Support
Hik-Connect	Support
Audio prompt	Support
General	
Built-in access controller	Yes
Power supply	2 A (DC 12 V ~ DC 24 V)
Power consumption	≤ 10 W
Working temperature	-30 °C ~ + 60 °C (-22 °F ~ +140 °F)
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Korean

▪ Available Model

DS-K1T341CMFW

▪ Dimension

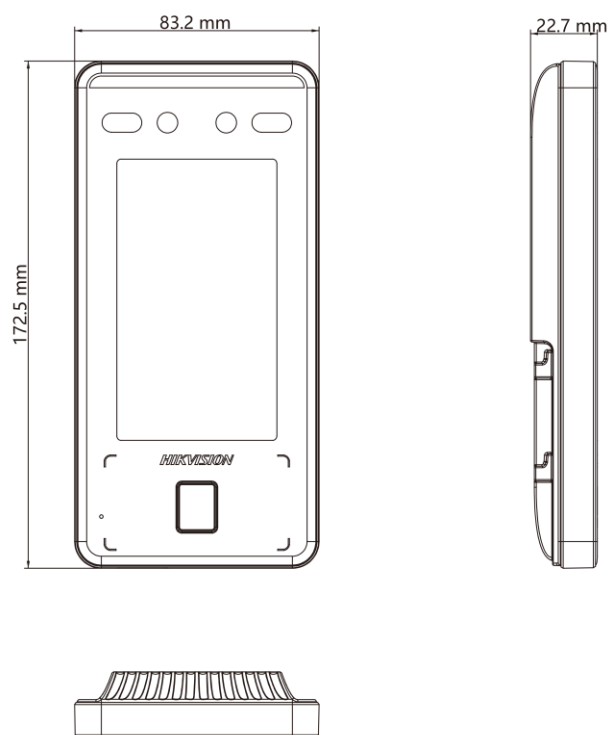

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq